



MXQ*A-Z, Air Slide Table, Double Ported Type

MXQ12A-100Z

Datasheet


General series information

- More compact: High reduced up to 10%.
- Lighter: Weight reduced up to 35%.
- More flexible: Piping ports and auto switch mounting grooves on both sides.
- Auto switch visibility improved.

Standard specifications

| | |
|--|---|
| Bore Size | 12 mm |
| Lube-retainer | Without Stable Lubrication Function |
| Stroke | 100 mm |
| Adjuster Option | Z (Without Adjuster) |
| Functional Option | Without Functional Option |
| Auto Switch | No Switch |
| Lead Wire or Prewired Connector | 0.5m (Or None in the Case of No Switch) |
| Number | 2 pcs. (Or None in the Case of No Switch) |
| Made to Order | None |
| Pressure medium | Compressed air |
| Maximum temperature of pressure medium | 60 °C |
| Minimum temperature of pressure medium | -10 °C |
| Maximum ambient temperature | 60 °C |
| Minimum ambient temperature | -10 °C |
| Number of pneumatic connections | 2 pcs. |
| Mode of operation of drive | Double acting |
| Weight | 0.610 Kg |

Dimensions

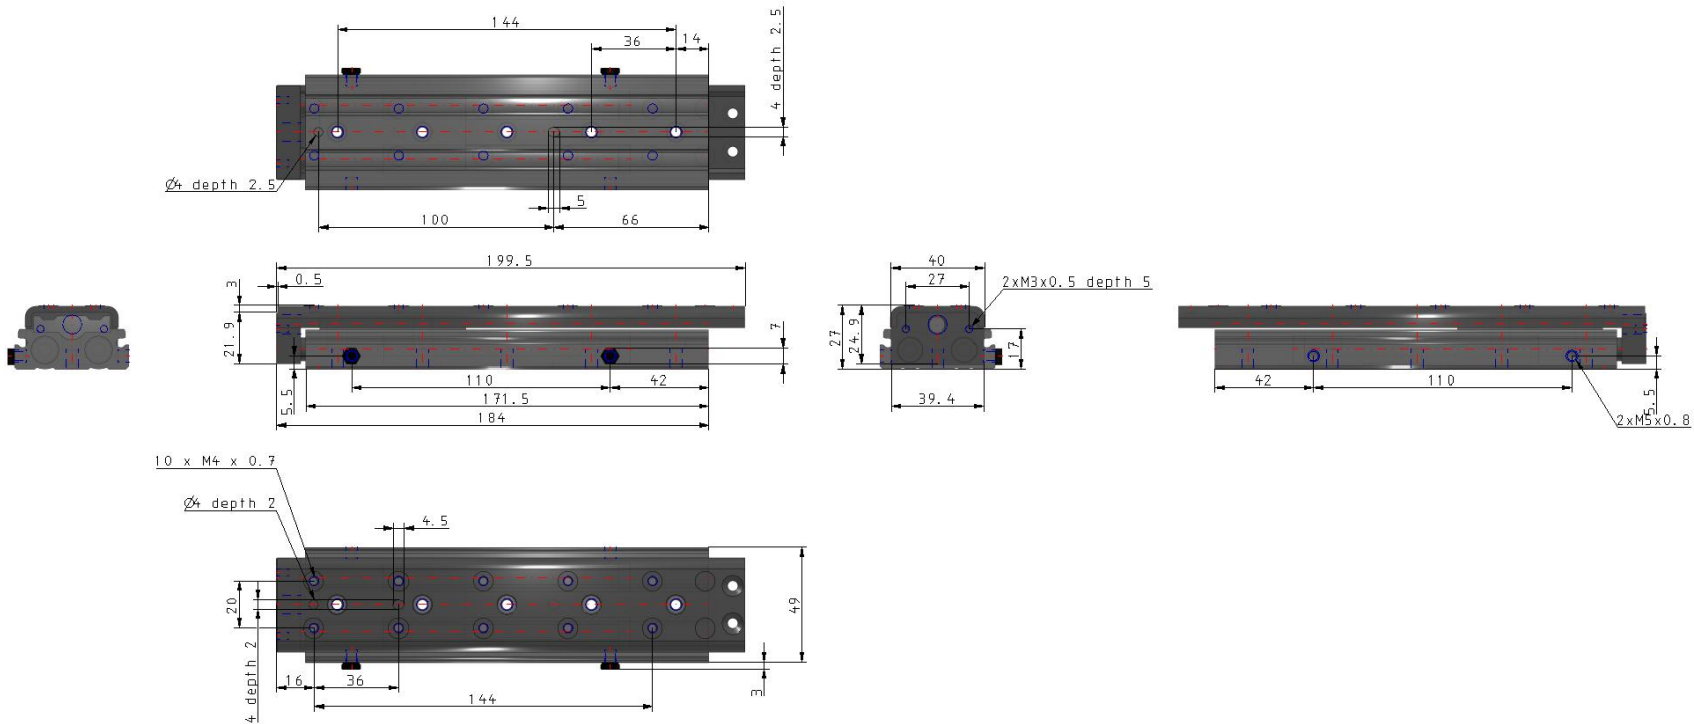

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Additional information

Catalogue

[MXQ-Z-C_EU.pdf](#)

Operation manuals

[OM_MXQ-Z_OMP0038EN-D.pdf](#)