

## C(D)U, Free Mount Cylinder, Long Stroke

### CDU20-70D

Datasheet

### General series information

- Bore sizes from 6mm to 32mm available
- Stroke lengths up to 100mm
- Any surfaces can be used for mounting
- Space saving
- Auto-switch capable



Double-acting, single-rod cylinder

### Standard specifications

|   |   |
|---|---|
| Magnet  | D (Built-in)                              |
| Bore Size   | 20 mm                                     |
| Port Thread   | M5x0.8; Rc1/8 for ø32                     |
| Stroke  | 70 mm                                     |
| Auto Switch   | No Switch                                 |
| Lead Wire or Prewired Connector                         | 0.5 m (Or None in the Case of No Switch)  |
| Number  | 2 pcs. (Or None in the Case of No Switch) |
| Maximum operating pressure                              | 0.7 MPa                                   |
| Minimum operating pressure                              | 0.05 MPa                                  |
| Proof pressure  | 1.05 MPa                                  |
| Theoretical cylinder force, advance stroke (at 0.5 MPa) | 157 N                                     |
| Theoretical cylinder force, return stroke (at 0.5 MPa)  | 132 N                                     |
| Type of cushioning                                      | Rubber Bumper                             |
| Piston rod end  | Male Thread                               |
| Lubrication   | Non-lube                                  |
| Fluid   | Air                                       |
| Ambient and fluid temperature                           | -10 - 60 °C                               |
| Stroke length tolerance                                 | 0+1.0 mm                                  |


|                  |               |
|------------------|---------------|
| Thread Tolerance | JIS Class2    |
| Piston speed     | 50 - 500 mm/s |
| Weight           | 0.238 Kg      |

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.



## Constructions

### ø16 to ø32 With auto switch

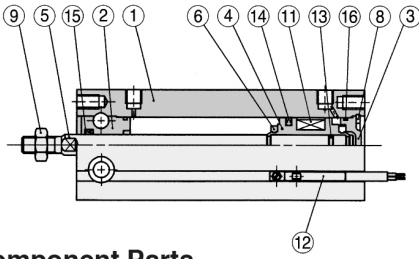

#### Component Parts

| No. | Description   | Material               | Note                                 |
|-----|---------------|------------------------|--------------------------------------|
| 1   | Cylinder tube | Aluminum alloy         | Hard anodized                        |
| 2   | Rod cover     | Aluminum bearing alloy | Hard anodized                        |
| 3   | Head cover    | Brass                  | ø6 to ø10, Electroless nickel plated |
|     |               | Aluminum alloy         | ø16 to ø32, Clear chromated          |
| 4   | Piston        | Brass                  | ø6 to ø10                            |
|     |               | Aluminum alloy         | ø16 to ø32, Chromated                |
| 5   | Piston rod    | Stainless steel        |                                      |
| 6   | Bumper A      | Urethane               |                                      |
| 7   | Bumper B      | Urethane               |                                      |

#### Component Parts

| No. | Description   | Material          | Note             |
|-----|---------------|-------------------|------------------|
| 8   | Snap ring     | Carbon tool steel | Phosphate coated |
| 9   | Rod end nut   | Carbon steel      | Nickel plated    |
| 10  | Magnet holder | Brass             | ø6               |
| 11  | Magnet        | Magnetic material |                  |
| 12  | Auto switch   | —                 |                  |
| 13  | Piston gasket | NBR               |                  |
| 14  | Piston seal   |                   |                  |
| 15  | Rod seal      |                   |                  |
| 16  | Gasket        |                   |                  |

## Additional information

|                   |                                      |
|-------------------|--------------------------------------|
| Catalogue         | <a href="#">CU_B_EU.pdf</a>          |
| Operation manuals | <a href="#">OM_CU_OM0002EN-A.pdf</a> |