




EX260, Integrated Type (For Output) Serial Transmission System EX260-SPN3

Datasheet

- Centralised & compact serial transmission system for output
- Compatible protocols: Ethernet POWERLINK, PROFINET, EtherNet/IP™, EtherCAT®, PROFIBUS DP, DeviceNet™, CC-Link, IO-Link, CANopen, Modbus, AS-Interface
- Up to 32 solenoids, up to 24 stations
- Applicable valve series: new SY, VQC, S0700, SV
- Up to IP67 enclosure compliant.

Protocol	PN (PROFINET)
Output Polarity/Communication Connector	3 [16 Outputs, -COM (PNP), M12 Connector]
Maximum ambient temperature	50 °C
Minimum ambient temperature	-10 °C
General power supply	24 VDC
Conform to the European RoHS Directive	Conform
Approvals	CE marking, UL (CSA) compatible
Operating humidity range	35 to 85% RH (No condensation)
Type of electrical connector	M12
Version	PROFINET Specification Version 2.2
Number of outputs	16
SI unit output polarity	Source/PNP (Negative common)
Communication speed	100 Mbps
Enclosure	IP67
Weight	0.200 Kg

Dimensions

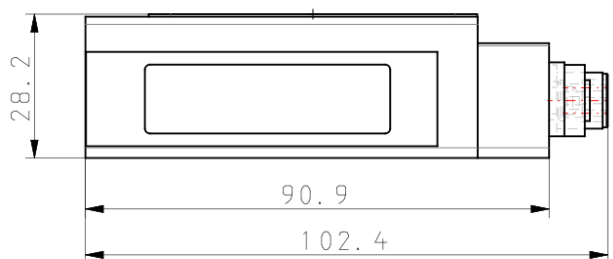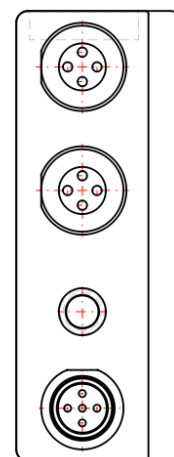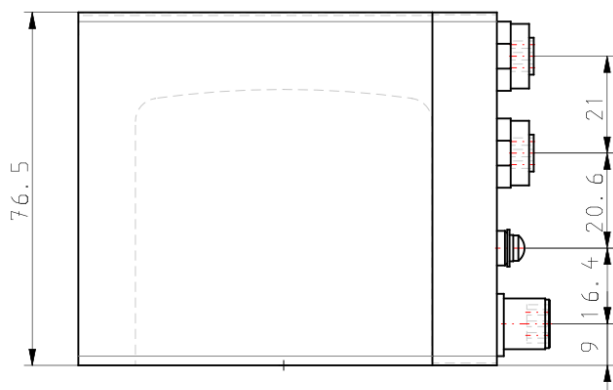

Additional information

Catalogue

[EX260-C_EU.pdf](#)