

MXQ*Z, Air Slide Table, Height Interchangeable Type MXQ20-20Z

Datasheet

General series information







- Mounting: Interchangeable in mounting with the conventional model.
- Height: Same height as the conventional model.
- Lighter: Weight reduced up to 31%.
- Auto switch visibility improved.

Standard specifications

| | |
|--|---|
| Bore Size | 20 mm |
| Body Option | Standard |
| Stroke | 20 mm |
| Adjuster Option | Z (Without Adjuster) |
| Functional Option | Without Functional Option |
| Auto Switch | No Switch |
| Lead Wire or Prewired Connector | 0.5m (Or None in the Case of No Switch) |
| Number | 2 pcs. (Or None in the Case of No Switch) |
| Made to Order | None |
| Side Adjuster Position | None (or Standard Type) |
| Pressure medium | Compressed air |
| Maximum temperature of pressure medium | 60 °C |
| Minimum temperature of pressure medium | -10 °C |
| Maximum operating pressure | 0.7 MPa |
| Minimum operating pressure | 0.15 MPa |
| Proof pressure | 1.05 MPa |
| Maximum ambient temperature | 60 °C |
| Minimum ambient temperature | -10 °C |
| Number of pneumatic connections | 2 pcs. |

| | |
|---|------------------------|
| Pneumatic input connection | M5 x 0.8 |
| Mode of operation of drive | Double acting |
| Theoretical cylinder force, advance stroke (at 0.5 MPa) | 314 N |
| Theoretical cylinder force, return stroke (at 0.5 MPa) | 264 N |
| Maximum piston speed | 500 mm/s |
| Type of cushioning | Internal rubber bumper |
| Weight | 0.870 Kg |

Dimensions

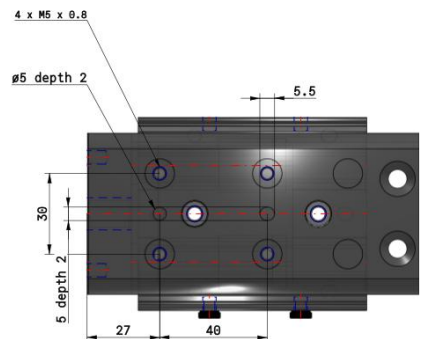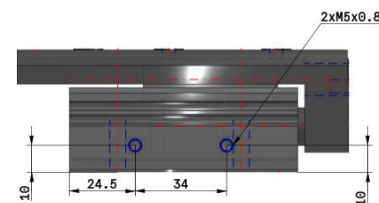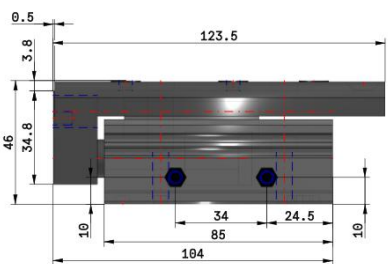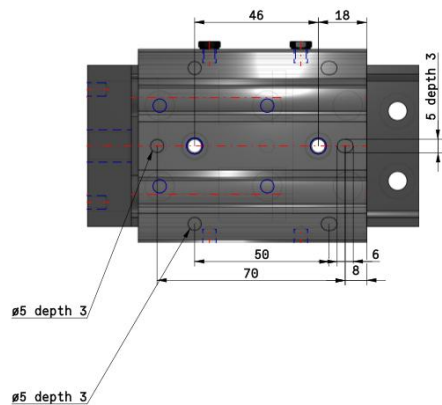

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

Additional information

Catalogue

[MXQ-Z-C_EU.pdf](#)

Operation manuals

[OM_MXQ-Z_OMP0038EN-D.pdf](#)