




## EX260, Integrated Type (For Output) Serial Transmission System EX260-SEN1

### Datasheet

- Centralised & compact serial transmission system for output
- Compatible protocols: Ethernet POWERLINK, PROFINET, EtherNet/IP™, EtherCAT®, PROFIBUS DP, DeviceNet™, CC-Link, IO-Link, CANopen, Modbus, AS-Interface
- Up to 32 solenoids, up to 24 stations
- Applicable valve series: new SY, VQC, S0700, SV
- Up to IP67 enclosure compliant.

Protocol	EN (EtherNet/IP)
Output Polarity/Communication Connector	1 [32 Outputs, -COM (PNP), M12 Connector]
Maximum ambient temperature	50 °C
Minimum ambient temperature	-10 °C
General power supply	24 VDC
Conform to the European RoHS Directive	Conform
Approvals	CE marking, UL (CSA) compatible
Operating humidity range	35 to 85% RH (No condensation)
Type of electrical connector	M12
Version	Volume 1(Edition 3.8), Volume 2(Edition 1.9)
Number of outputs	32
SI unit output polarity	Source/PNP (Negative common)
Communication speed	10 M/100 Mbps
Enclosure	IP67
Weight	0.204 Kg

## Dimensions

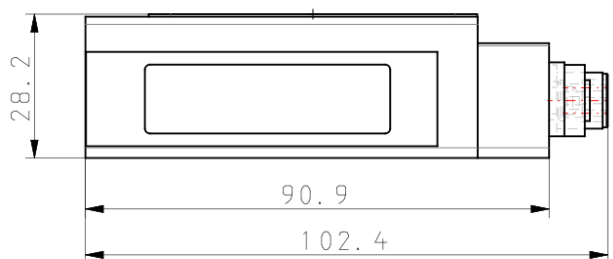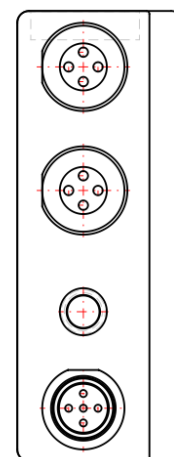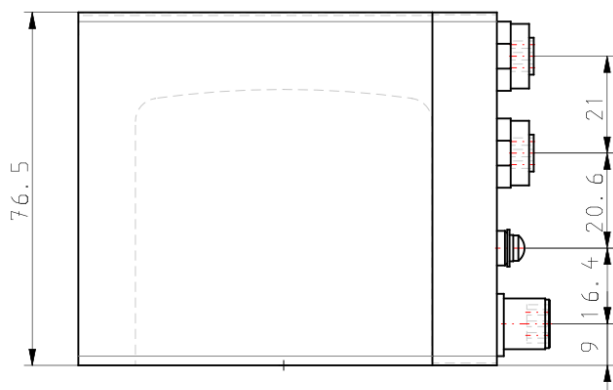

## Additional information

Catalogue

[EX260-C\\_EU.pdf](#)