

KK*S-*L, S-Couplers, Elbow Type with One-touch Fitting KK6S-16L


Datasheet

- Elbow Type with One-touch Fitting.
- Body size: M5, 1/8, 1/4, 1/2.
- Applicable Tubing O.D.: $\varnothing 3.2$, $\varnothing 4$, $\varnothing 6$, $\varnothing 8$, $\varnothing 10$, $\varnothing 12$, $\varnothing 16$.

Standard specifications

Body Size	6 (1/2)
Applicable Tubing O.D.	$\varnothing 16$ mm
-	Air, Water
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0 kPa
Proof pressure	1.5 MPa
Effective Area	82 mm ²
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Weight	0.090 Kg

Dimensions

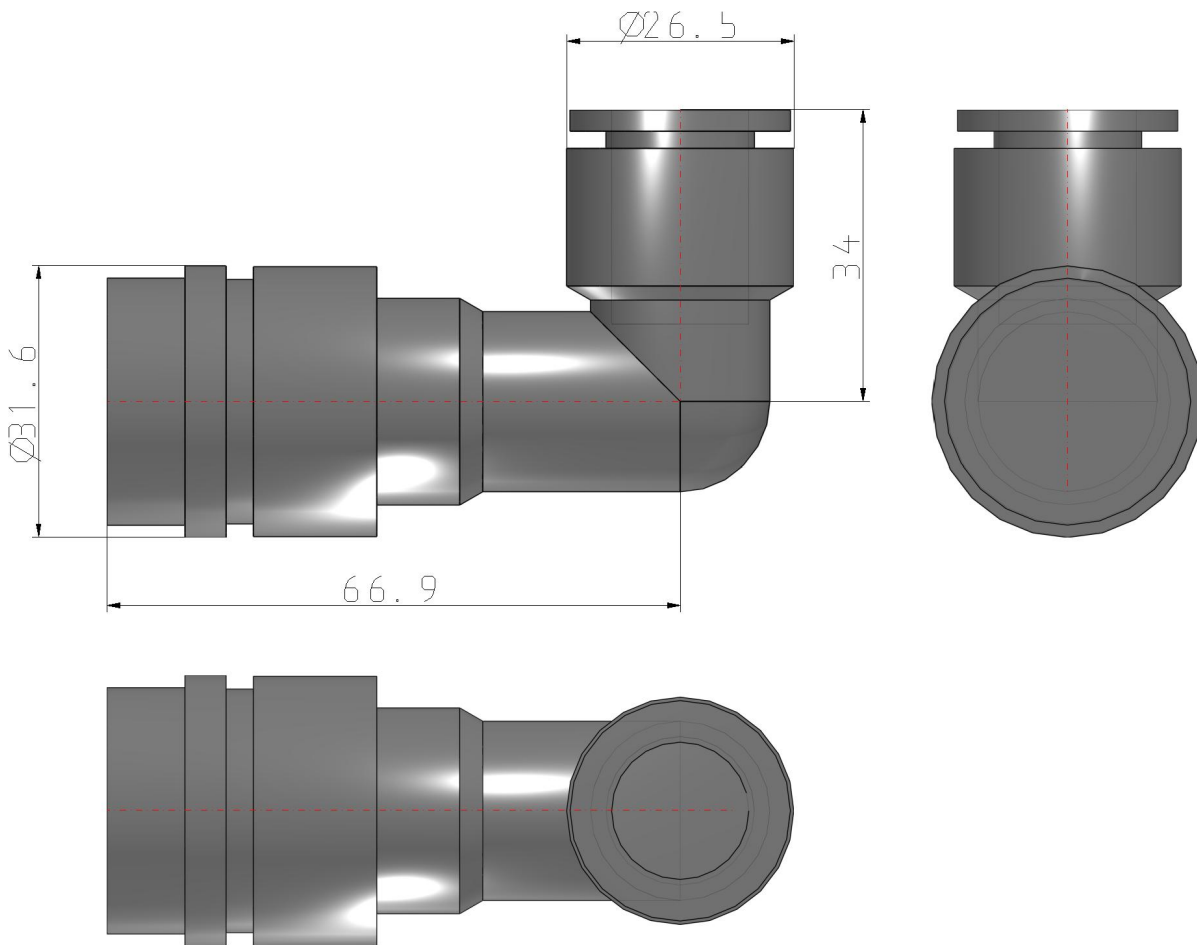

Additional information

Catalogue

[KK-C_EU.pdf](#)