


# AN02, Silencer, High Noise Reduction Style

## AN302-03

Datasheet

### General series information

- Fluid: compressed air
- Noise reduction: 25-35 dB(A) or more
- Maximum operating pressure: 1.0MPa
- Effective area mm<sup>2</sup> (Cv): AN\*00 35-960 (1.9-5.3); AN\*02 35-90 (1.9-5.0); AN\*03 10-60 (0.6-3.3)
- Ambient & fluid temperature: 5 - 60° C






Silencer

### Standard specifications

Model	AN302-03 (Size 3-Standard+Compact+High Noise Reduction; High Noise Reduction (35 dB), Flame Resistant; Port Size 3/8)
Pressure medium	Compressed Air
Maximum operating pressure	1.0 MPa
Maximum ambient temperature	60 °C
Minimum ambient temperature	5 °C
Noise reduction	25-35 dB
Effective Area	60 mm <sup>2</sup>
Weight	0.033 Kg

# Dimensions

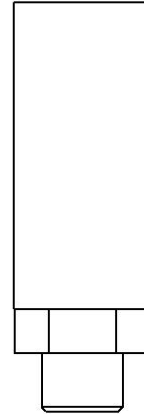

## Additional information

Catalogue

[AN\\_EU.pdf](#)