
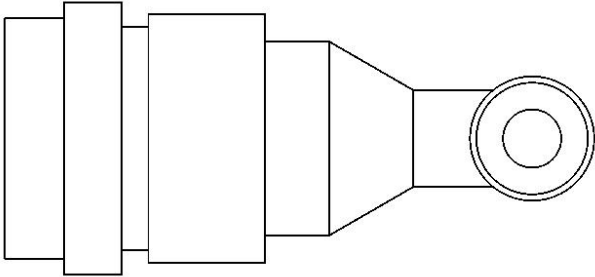



## KK\*S-\*L, S-Couplers, Elbow Type with One-touch Fitting KK4S-06L

- Elbow Type with One-touch Fitting.
- Body size: M5, 1/8, 1/4, 1/2.
- Applicable Tubing O.D.:  $\varnothing 3.2$ ,  $\varnothing 4$ ,  $\varnothing 6$ ,  $\varnothing 8$ ,  $\varnothing 10$ ,  $\varnothing 12$ ,  $\varnothing 16$ .

Body Size	4 (1/4)
Applicable Tubing O.D.	$\varnothing 6$ mm
-	Air, Water
Maximum operating pressure	1.0 MPa
Minimum operating pressure	0 kPa
Proof pressure	1.5 MPa
Effective Area	39 mm <sup>2</sup>
Sealing principle	Electroless nickel plated (copper-free application), With male thread sealant
Weight	0.043 Kg

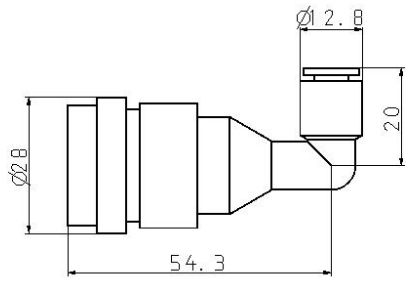

-

-

KK-C\_EU.pdf